

MAC 04 Series

4-6 WATTS - DC/DC SINGLE & MULTIPLE OUTPUT

FEATURES


- 2:1 Input range
- Pi input filter
- Meet EN55022 class B
- 500 VDC isolation voltage
- 24-pin DIP Package
- Efficiency to 84%
- Regulated output
- Continuous short circuit protection
- Remote ON/OFF control option



SPECIFICATIONS

INPUT	
Nominal voltage	12V, 24V, 48V.
Voltage range	9-18V, 18-36V, 36-72V.
Isolation	500VDC (3kV available).
Filter	PI-type
OUTPUT	
Power	5W to 6W.
Regulation	Line:±0.5%. Load:Single: ±0.5 %. 10% min load is required to meet specification. Dual:±1%. 25% min load is required to meet specification
Setting accuracy	± 2%.
Ripple and noise	5 V:max. 100 mVp-p. 12/15 V:max. 1% p-p.
Short circuit protection	Fold-back. Approx 80% of output current at short circuit.
Temp coefficient	±0.05 %/°C.
Efficiency	70-80 %.
ENVIRONMENTAL	
Operating temperature	-25°C to +71°C.
Storage temperature	-40°C to +100°C.
Cooling	Convection.
GENERAL	
MTTF	200 000 hours at 25°C ambient.
Switching frequency	Min. 100 kHz.
Equivalent capacitance	650 pF.
Case	Non-conductive black plastic.
Dimensions (H x W x L)	12.7 x 20.3 x 31.8 mm.
Weight	15g.

TECHNICAL ILLUSTRATIONS

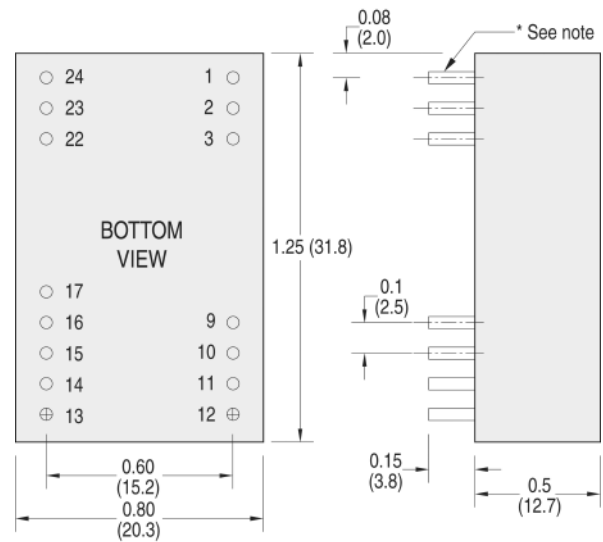

* Pin size is 0.020" Inch (0.5mm) DIA or 0.0200x0.14 Inch

MAC 04 Series

4-6 WATTS - DC/DC SINGLE & MULTIPLE OUTPUT

SELECTION TABLE

POWERBOX ARTICLE NUMBER	INPUT VOLTAGE VDC	OUTPUT VOLTAGE VDC	OUTPUT CURRENT MA	INPUT CURRENT NO LOAD MA	INPUT CURRENT FULL LOAD MA
MAC 04 003	9-18	3.3	1000	7.5	405
MAC 04 006	9-18	5	1000	7.5	545
MAC 04 009	9-18	12	470	7.5	585
MAC 04 012	9-18	15	400	7.5	625
MAC 04 015	9-18	±5	500	12	545
MAC 04 018	9-18	±12	230	12	575
MAC 04 021	9-18	±15	190	12	590
MAC 04 024	18-36	3.3	1000	5	195
MAC 04 027	18-36	5	1000	5	265
MAC 04 030	18-36	12	470	5	285
MAC 04 033	18-36	15	400	5	305
MAC 04 036	18-36	±5	500	7.5	265
MAC 04 039	18-36	±12	230	7.5	285
MAC 04 042	18-36	±15	190	7.5	295
MAC 04 045	36-72	3.3	1000	2	98
MAC 04 048	36-72	5	1000	2	133
MAC 04 051	36-72	12	470	2	145
MAC 04 054	36-72	15	400	2	154
MAC 04 057	36-72	±5	500	3	265
MAC 04 060	36-72	±12	230	3	142
MAC 04 063	36-72	±15	190	3	147

For isolation voltage 3kV add suffix -H, 1.5kV add suffix -HM to the article number. Ex MAC 04 003H.

STANDARD PIN CONNECTION 500VDC

PIN	SINGLE OUTPUT	DUAL OUTPUT
1	+V Input	+V Input
2	NC	-V Output
3	NC	Common
9	NP	NP
10	-V Output	Common
11	+V Output	+V Output
12	-V Input	-V Input
13	-V Input	-V Input
14	+V Output	+V Output
15	-V Output	Common
16	NP	NP
17	NP	NP
22	NC	Common
23	NC	-V Output
24	+V Input	+V Input

PIN CONNECTION 1.5KVDC/3KVDC

PIN	SINGLE OUTPUT	DUAL OUTPUT
1	NP	NP
2	-V Input	-V Input
3	-V Input	-V Input
9	NC	Common
10	NC	NC
11	NC	-V Output
12	NP	NP
13	NP	NP
14	+V Output	+V Output
15	NC	NC
16	-V Output	Common
17	NP	NP
22	+V Input	+V Input
23	+V Input	+V Input
24	NP	NP